XIANGRUI

2019

NINGBO XIANGRUI LIGHTING CO.,LTD
336# Tongning road,Jiangbei district,Ningbo of China 315100

Mobile: 0086-18267460392(WhatsApp / Wechat)
Email: info@xiangruilight. com
Tel: 0086-574-87877483
Skype: jennyhou8511
Fax: 0086-574-87874163

www.xiangruilight.com

2019 LED FLOODLIGHT - HIGHBAY - WORK LIGHT - Ningbo Xiangrui Lighting Co.,Ltd.

XIANGRUI

CONCENTRATED PROFESSIONAL CREATIVE
FOR LIGHTING PRODUCTS

2019

GOAL

OFFER QUALIFIED LIGHTING PRODUCTS WITH WELL-PLEASING SERVICE.

Ningbo XiangRui Lighting Co. , Ltd

Concentrated, Professional and Creative in lighting products,we do lighting products from design to moulded,from assembly to packing, from shipping to after-sales service. So we offer one package service for lighting products from China.

We own a team who take lighting as lifelong career. Meanwhile we are committed to training more young people who love lighting join us to realize our goal that is offering qualified lighting products with well-pleasing service. About our factory, we have good working environment and skilled workers for lighting products. OEM production and ODM production are both available from us.

Our products scope involves led floodlight, led highbay, led work light, rechargeable work light, led street light and other related led lighting items. We have experiences offering products to many famous brand from Turkey, South Africa, Brazil, Russia, Italy, Chile, Argentina etc.

We welcome any of your comments and suggestion. Hope to grow together!

Factory Profile

- Qualification: CE RoHS ISO9001 ErP
- Area: 10000 m^2
- Production Line: 180
- Workers: 9
- Productivity: 400000pcs per month

Every new worker must with trainning before go to production line, and during their working we have QC to make sure they do right thing we take specialized work with specialized post so each step with traceability

Soldering very easy but very important for lighting products,we not only request for super strong adhesion but also must good looking

Laboratory

Integrating sphere, Constant temperature and humidity test chamber, drop test,weight test, EMC test, high-voltage test, surging test and other request from third party inspection.

FRAME Series
SMD10W-200W
LED Floodlight

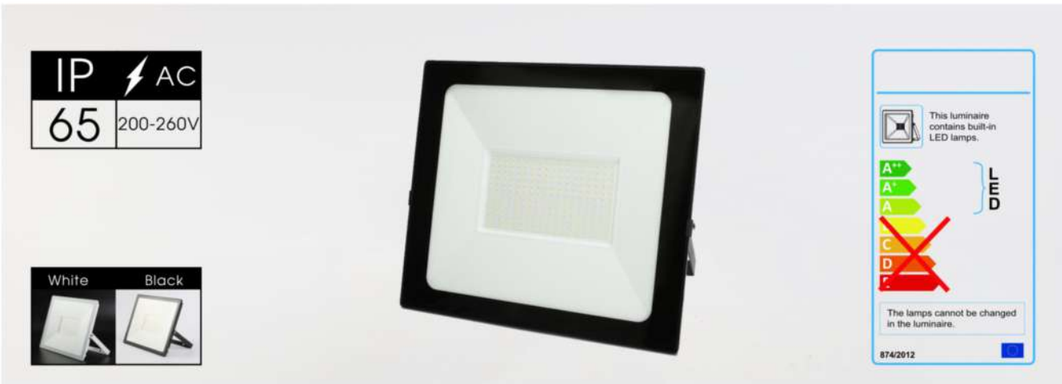



CE RoHS COMPLIANT ERP COMPLIANT ADJUSTABLE

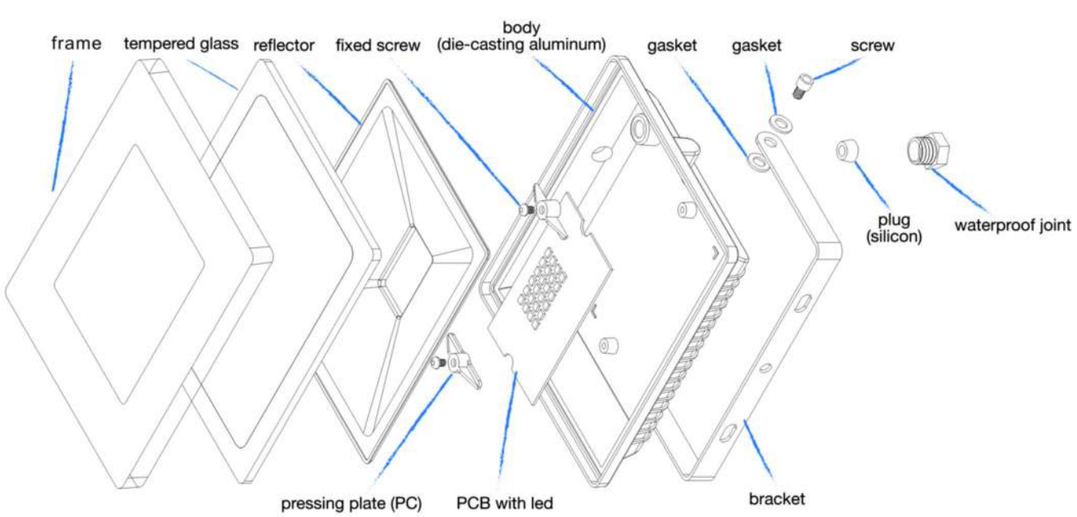

XIANGRUI

FRAME Series
SMD10W-200W
LED Floodlight

XR-FDC10W-F

1 10W

800lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:98x30x74mm
CTN size:L43.0XW24.0XH18.5 CM
40 pcs/CTN - G.W:7.3KG

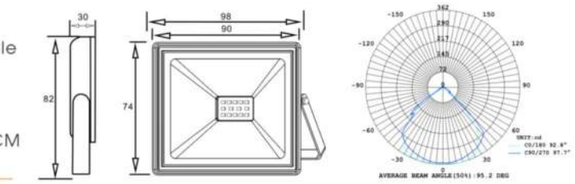

XR-FDC20W-F

2 20W

1600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:118x35x94mm
CTN size:L28.5XW26.5XH23.0 CM
24 pcs/CTN - G.W:6.6KG

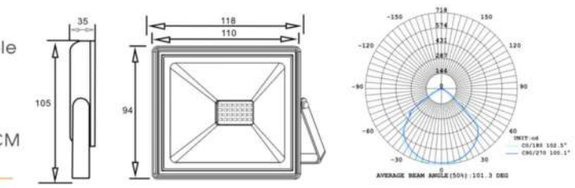

XR-FDC30W-F

3 30W

2400lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:148x35x125mm
CTN size:L32.5XW31.5XH27.5 CM
24 pcs/CTN - G.W:10.6KG

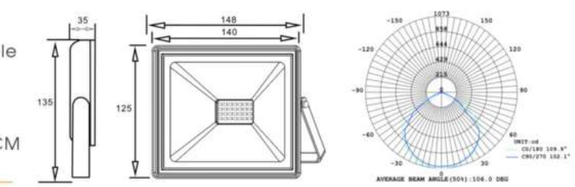

XR-FDC50W-F

4 50W

4000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:178x35x155mm
CTN size:L38.5XW26.5XH33.5 CM
20 pcs/CTN - G.W:13.3KG

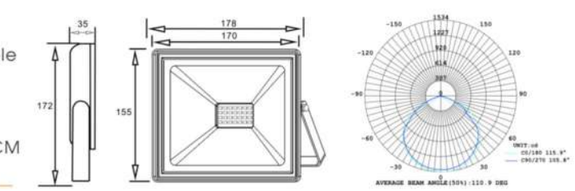

FRAME Series
SMD10W-200W
LED Floodlight

XR-FDC70W-F

1 70W

5600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:218x35x185mm
CTN size:L45.0XW31.5XH20.5 CM
12 pcs/CTN - G.W:12.1KG

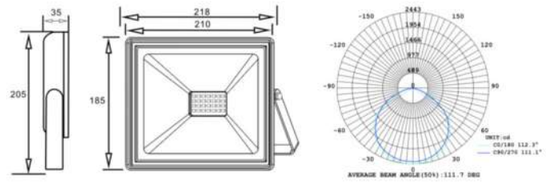

XR-FDC100W-F

2 100W

8000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:250x35x222mm
CTN size:L53.0XW27.0XH24.5 CM
10 pcs/CTN - G.W:14.1KG

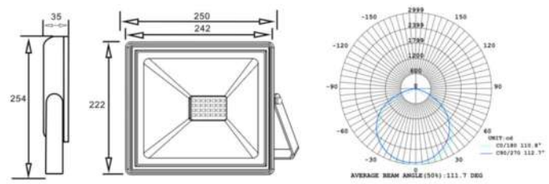

XR-FDC150W-F

3 150W

12000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:350x45x310mm
CTN size:L38.0XW31.5XH33.5 CM
5 pcs/CTN - G.W:14.1KG

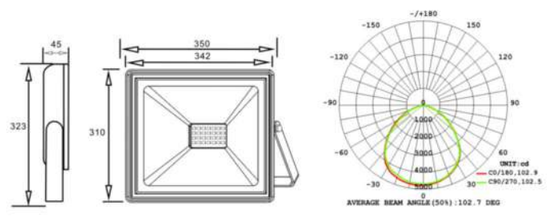

XR-FDA200W

4 200W

16000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:385x45x340mm
CTN size:L41.0XW31.5XH36.5 CM
5 pcs/CTN - G.W:16.7KG

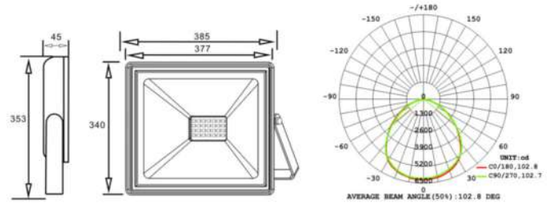

FRAME Series
SMD 20W-70W
LED Floodlight

XR-FDC20W-FD

1 20W

1600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:118x45x167mm
CTN size:L38XW31.5XH25.5 CM
24 pcs/CTN - G.W:8.2KG

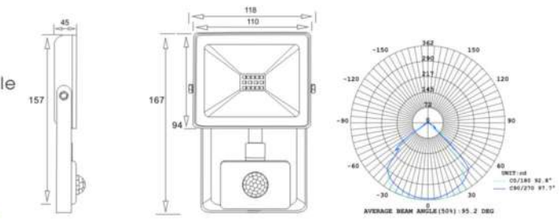

XR-FDC30W-FD

2 30W

2400lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:148x45x197mm
CTN size:L44.5XW31.5XH32.5 CM
24 pcs/CTN - G.W:11.9KG

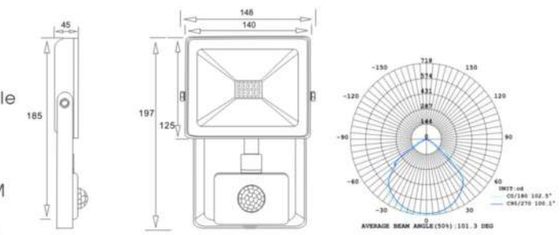

XR-FDC50W-FD

3 50W

4000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:178x48x227mm
CTN size:L50.5XW26.5XH39.5 CM
20 pcs/CTN - G.W:15.4KG

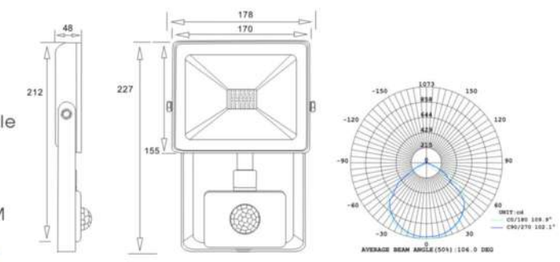

XR-FDC70W-FD

4 70W

5600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:218x48x257mm
CTN size:L46.5XW31.5XH28.5 CM
12 pcs/CTN - G.W:13.8KG

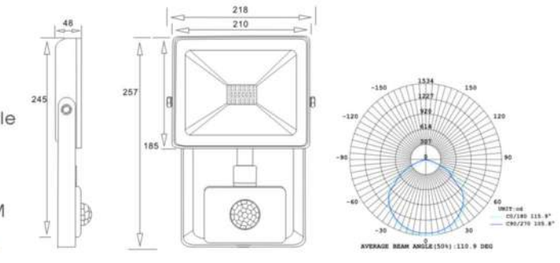

MARS Series
SMD10W-400W
LED Floodlight

CE RoHS COMPLIANT ERP COMPLIANT ADJUSTABLE

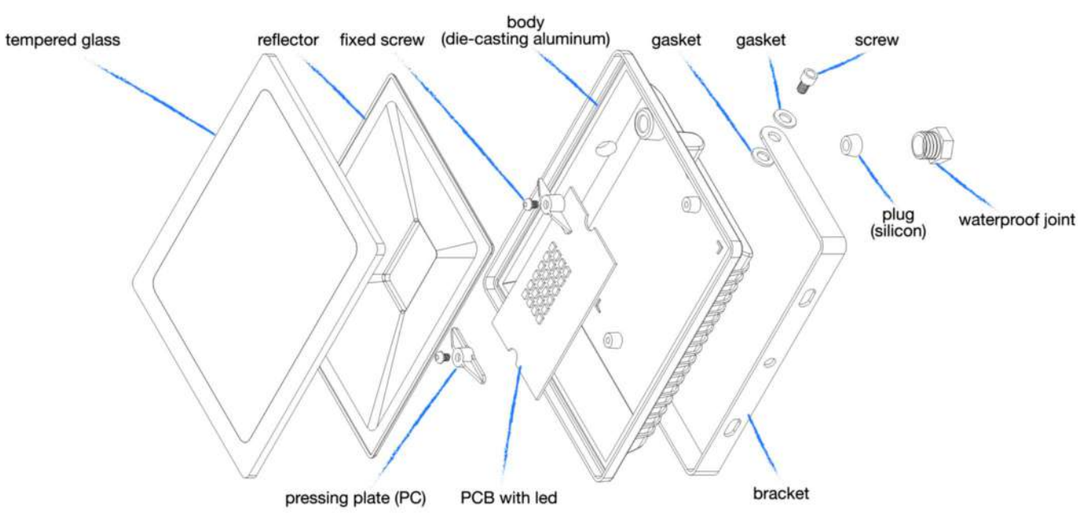

XIANGRUI

MARS Series
SMD10W-400W
LED Floodlight

XR-FDA10W

1 10W

800lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:118x33x90mm
CTN size:L28.5XW26.5XH23.0 CM
24 pcs/CTN - G.W:6.4KG

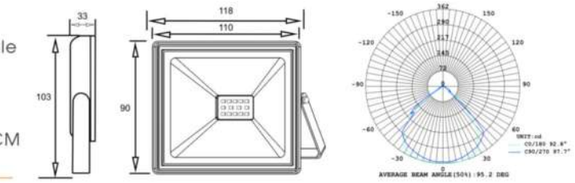

XR-FDA20W

2 20W

1600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:150x33x120mm
CTN size:L32.5XW28.5XH27.5 CM
24 pcs/CTN - G.W:9.3KG

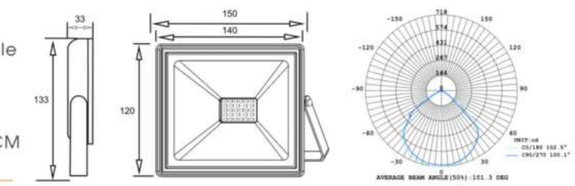

XR-FDA30W

3 30W

2400lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:178x33x150mm
CTN size:L40.5XW24.0XH33.0 CM
20 pcs/CTN - G.W:12.0KG

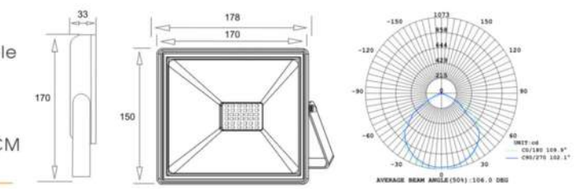

XR-FDA50W

4 50W

4000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:218x33x180mm
CTN size:L45.0XW31.5XH20.5 CM
12 pcs/CTN - G.W:11.5KG

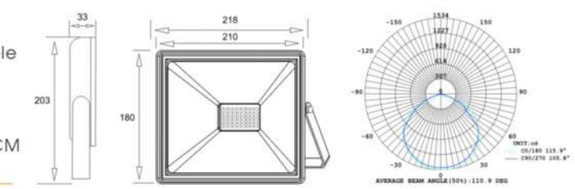

MARS Series
SMD10W-400W
LED Floodlight

XR-FDA70W

1 70W 5600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:250x35x217mm
CTN size:L52.0XW27.0XH24.0 CM
10 pcs/CTN - G.W:14.0KG





XR-FDA100W

2 100W 8000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:286x35x251mm
CTN size:L42.0XW26.5XH30.5 CM
8 pcs/CTN - G.W:13.8KG





XR-FDA150W

3 150W 12000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:350x45x310mm
CTN size:L38.0XW31.5XH33.5 CM
5 pcs/CTN - G.W:14.0KG





XR-FDA200W

4 200W 16000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:386x45x340mm
CTN size:L41.0XW31.5XH36.5 CM
5 pcs/CTN - G.W:17.0KG





XIANGRUI

MARS Series
SMD10W-400W
LED Floodlight

XR-FDA300W

1 300W 24000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:480x60x310mm
CTN size:L50.5XW41.5XH22.5 CM
2 pcs/CTN - G.W:11.0KG

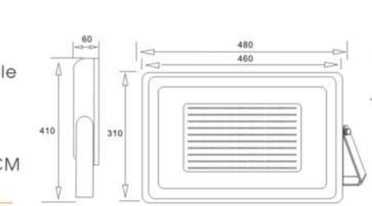



XR-FDA400W

2 400W 32000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:540x60x375mm
CTN size:L56.5XW44.5XH22.5 CM
2 pcs/CTN - G.W:14.5KG

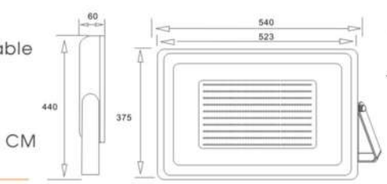



MARS Series
SMD 10W-50W
LED Floodlight

CE RoHS COMPLIANT ERP COMPLIANT ADJUSTABLE

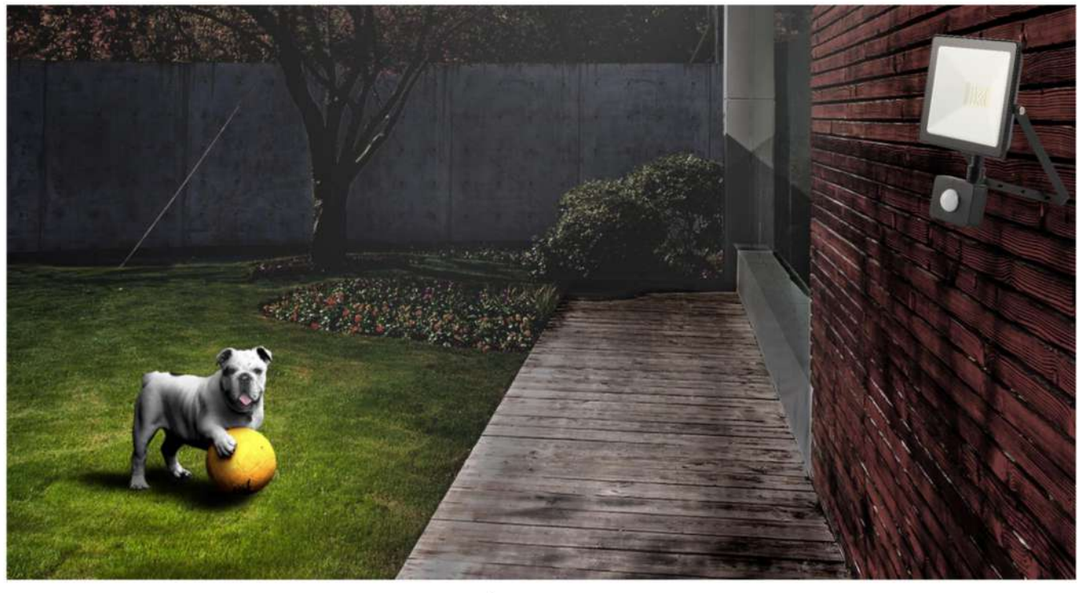

XIANGRUI

MARS Series
SMD 10W-50W
LED Floodlight

XR-FDA10W-D **1** 10W

800lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:118x45x165mm
CTN size:L38XW31.5XH25.5 CM
24 pcs/CTN - G.W:7.6KG

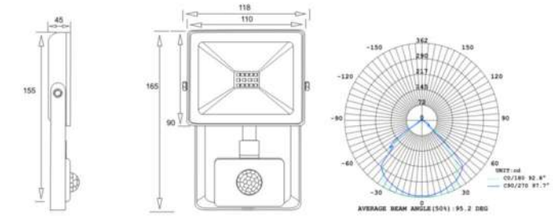

XR-FDA20W-D **2** 20W

1600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:148x45x195mm
CTN size:L44.5XW31.5XH32.5 CM
24 pcs/CTN - G.W:11.5KG

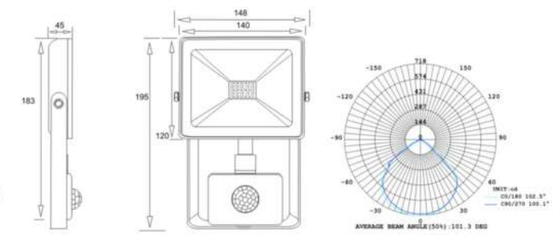

XR-FDA30W-D **3** 30W

2400lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:178x48x225mm
CTN size:L50.5XW31.5XH39.5 CM
24 pcs/CTN - G.W:17.5KG

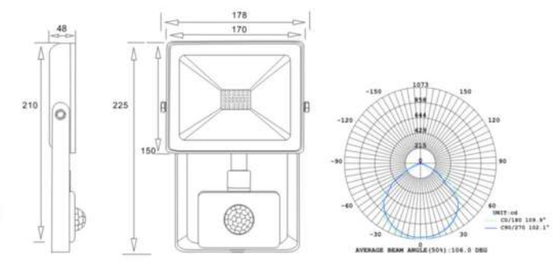

XR-FDA50W-D **4** 50W

4000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:218x48x255mm
CTN size:L46.5XW31.5XH28.5 CM
12 pcs/CTN - G.W:13.0KG

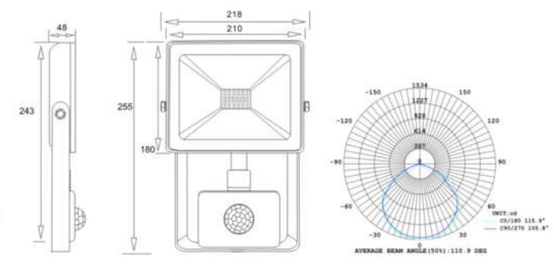

HONEYCOMB Series

SMD10W-100W LED Floodlight

CE RoHS COMPLIANT ERP COMPLIANT ADJUSTABLE

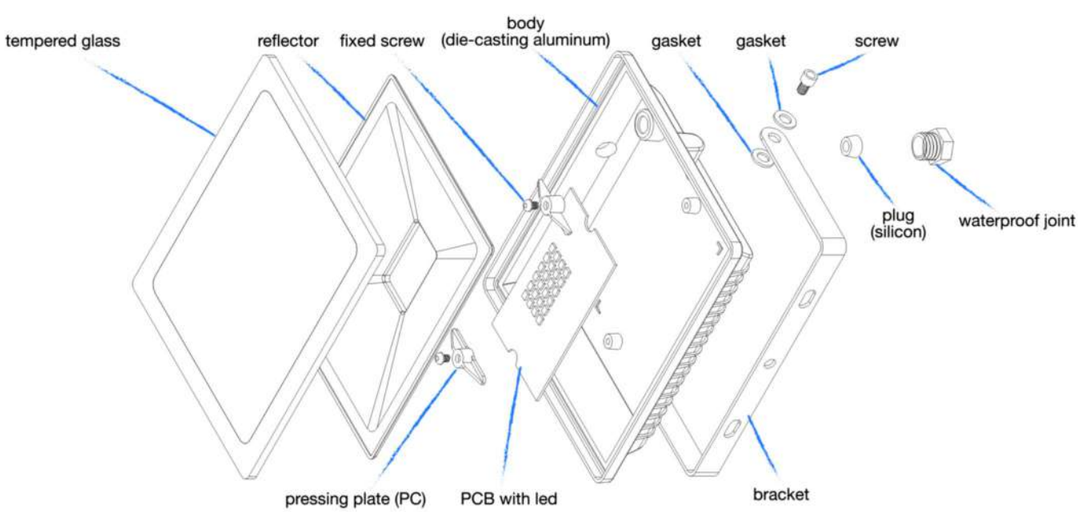

HONEYCOMB Series

SMD10W-100W LED Floodlight

XR-FDB10W

1 10W

800lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:100x33x70mm
CTN size:L43.0XW24.0XH18.5 CM
40 pcs/CTN - G.W:7.5KG

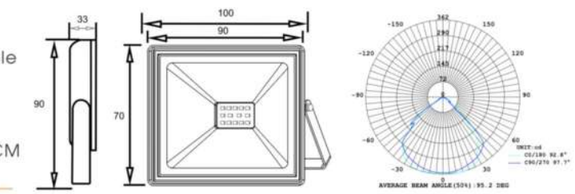

XR-FDB20W

2 20W

1600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:130x33x90mm
CTN size:L28.5XW28.5XH22.5 CM
24 pcs/CTN - G.W:7.0KG

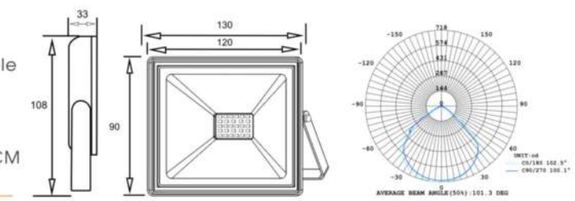

XR-FDB30W

3 30W

2400lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:160x33x130mm
CTN size:L34.5XW23.5XH30.0 CM
20 pcs/CTN - G.W:10.5KG

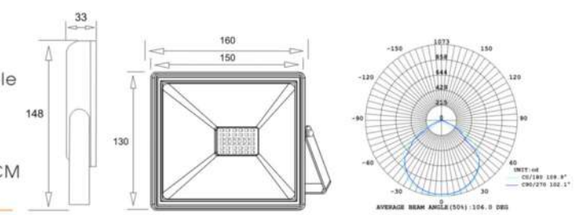

XR-FDB50W

4 50W

4000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:200x33x170mm
CTN size:L43.0XW28.5XH28.5 CM
12 pcs/CTN - G.W:10.2KG

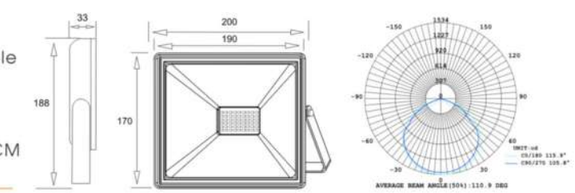

XR-FDB100W

5 100W

8000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G1.0mm2 cable

Aluminum die-casting

Size:270x35x240mm
CTN size:L38.0XW28.5XH26.5 CM
8 pcs/CTN - G.W:13.6KG

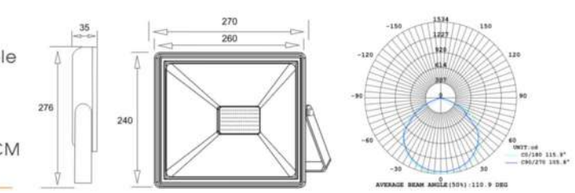

FLAT Series
SMD10W-400W
LED Floodlight



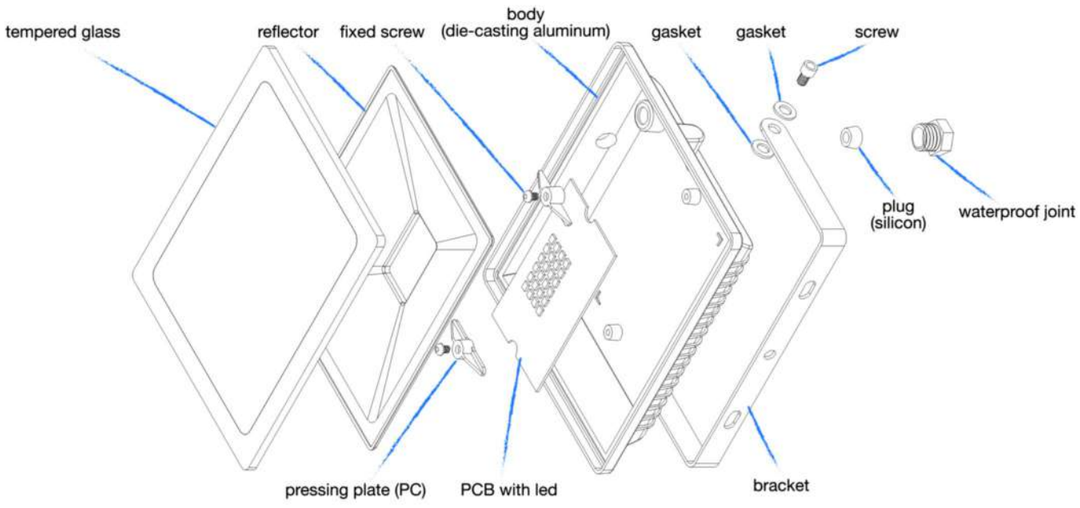

XIANGRUI

FLAT Series
SMD10W-400W
LED Floodlight

XR-FDC10W

1 10W

800lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:98x30x70mm
CTN size:L43.0XW24.0XH18.5 CM
40 pcs/CTN - G.W:7.3KG





XR-FDC20W

2 20W

1600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:118x35x90mm
CTN size:L28.5XW26.5XH23.0 CM
24 pcs/CTN - G.W:6.5KG





XR-FDC30W

3 30W

2400lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:148x35x120mm
CTN size:L32.5XW31.5XH27.5 CM
24 pcs/CTN - G.W:10.5KG





XR-FDC50W

4 50W

4000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:178x35x150mm
CTN size:L38.5XW26.5XH33.5 CM
20 pcs/CTN - G.W:13.2KG





FLAT Series
SMD10W-400W
LED Floodlight

XR-FDC70W

1 70W 5600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:218x35x180mm
CTN size:L45.0XW31.5XH20.5 CM
12 pcs/CTN - G.W:10.0KG

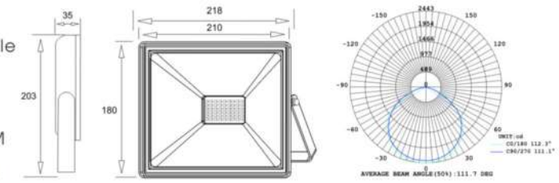

XR-FDC100W

2 100W 8000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:250x35x215mm
CTN size:L52.0XW27.0XH24.0 CM
10 pcs/CTN - G.W:14.0KG

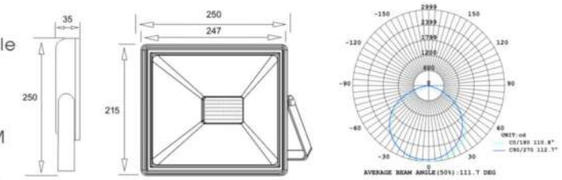

XR-FDC150W

3 150W 12000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:350x45x310mm
CTN size:L38.0XW31.5XH33.5 CM
5 pcs/CTN - G.W:14.3KG

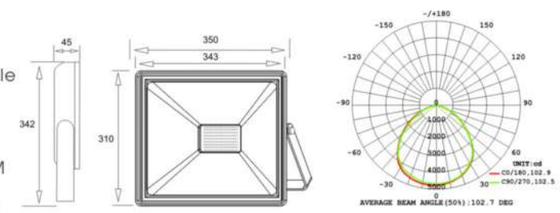

XR-FDC200W

4 200W 16000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:385x45x340mm
CTN size:L41.0XW31.5XH36.5 CM
5 pcs/CTN - G.W:16.5KG

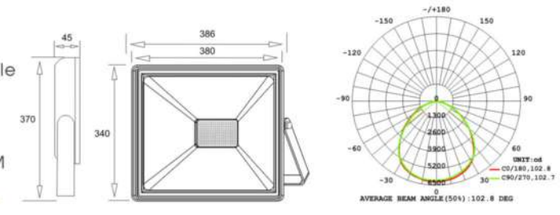

XIANGRUI

FLAT Series
SMD10W-400W
LED Floodlight

XR-FDC300W

1 300W 24000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:480x60x310mm
CTN size:L50.5XW41.5XH22.5 CM
2 pcs/CTN - G.W:11.0KG

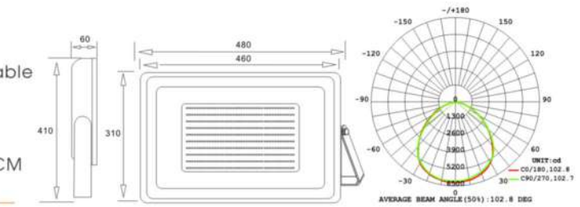

XR-FDC400W

2 400W 32000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:540x60x375mm
CTN size:L56.5XW44.5XH22.5 CM
2 pcs/CTN - G.W:14.5KG

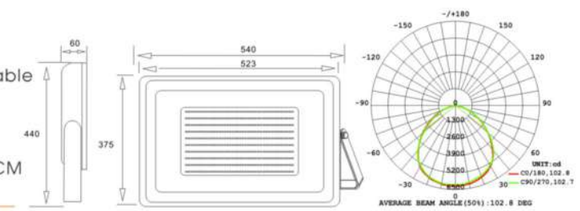

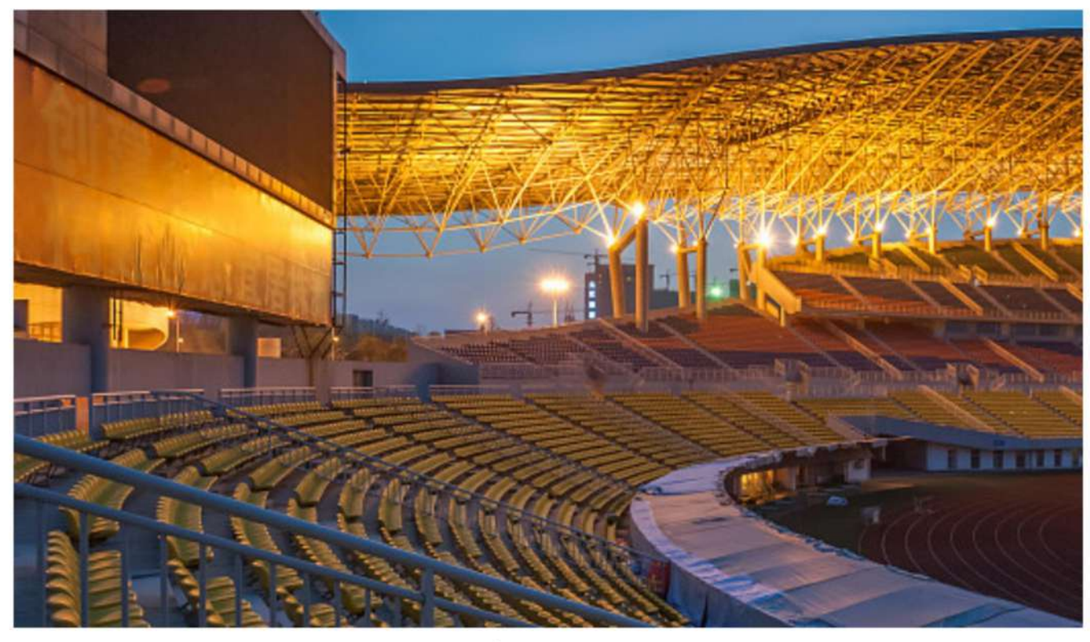

FLAT Series
SMD 20W-70W
LED Floodlight

CE RoHS COMPLIANT ERP COMPLIANT ADJUSTABLE

XIANGRUI

FLAT Series
SMD 20W-70W
LED Floodlight

XR-FDC20W-D

1 20W

1600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:118x48x165mm
CTN size:L38XW31.5XH25.5 CM
24 pcs/CTN - G.W:7.8KG

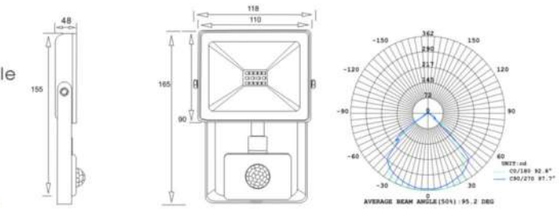

XR-FDC30W-D

2 30W

2400lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:148x48x195mm
CTN size:L44.5XW31.5XH32.5 CM
24 pcs/CTN - G.W:11.5KG

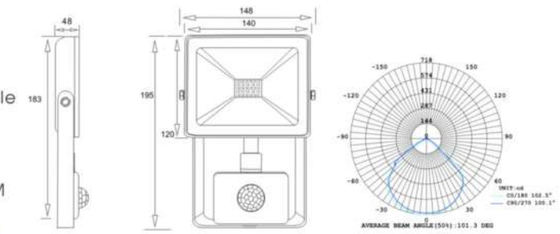

XR-FDC50W-D

3 50W

4000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:178x50x225mm
CTN size:L50.5XW 26.5XH39.5 CM
20 pcs/CTN - G.W:15.0KG

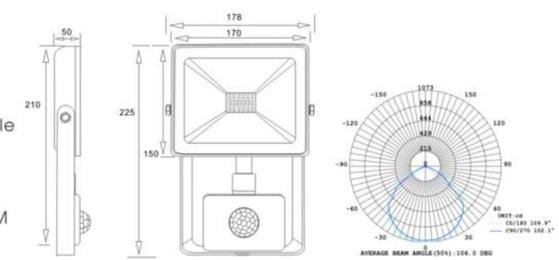

XR-FDC70W-D

4 70W

5600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:218x50x255mm
CTN size:L46.5XW31.5XH28.5 CM
12 pcs/CTN - G.W:13.5KG

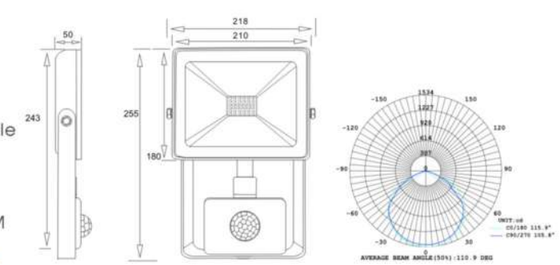

FAST Series
SMD10W-500W
LED Floodlight

CE RoHS COMPLIANT ERP COMPLIANT ADJUSTABLE

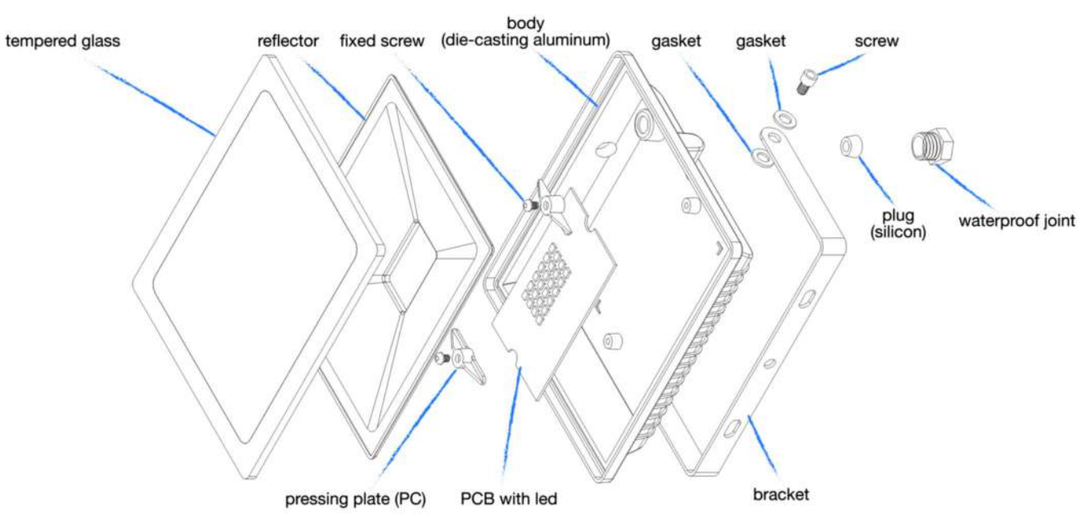

XIANGRUI

FAST Series
SMD10W-500W
LED Floodlight

XR-FDA10W-L **1** 10W

800lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:98x30x70mm
CTN size:L43.0XW24.0XH18.5 CM
40 pcs/CTN - G.W:7.3KG





XR-FDA20W-L **2** 20W

1600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:118x35x90mm
CTN size:L28.5XW26.5XH23.0 CM
24 pcs/CTN - G.W:6.4KG





XR-FDA30W-L **3** 30W

2400lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:150x35x120mm
CTN size:L32.5XW31.5XH27.5 CM
24 pcs/CTN - G.W:9.3KG





XR-FDA50W-L **4** 50W

4000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:178x35x150mm
CTN size:L40.5XW24.0XH33.0 CM
20 pcs/CTN - G.W:12.5KG





FAST Series
SMD10W-500W
LED Floodlight

XR-FDA70W-L

1 70W 5600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:218x35x180mm
CTN size:L45.0XW31.5XH20.5 CM
12 pcs/CTN - G.W:11.5KG

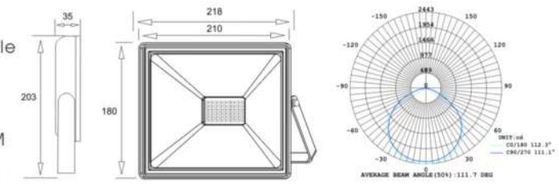

XR-FDA100W-L

2 100W 8000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:250x35x215mm
CTN size:L52.0XW27.0XH24.0 CM
10 pcs/CTN - G.W:14.0KG

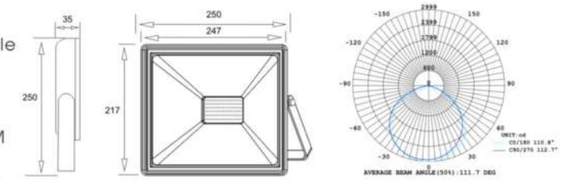

XR-FDA150W-L

3 150W 12000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:286x35x251mm
CTN size:L42.0XW26.5XH30.5 CM
8 pcs/CTN - G.W:13.8KG

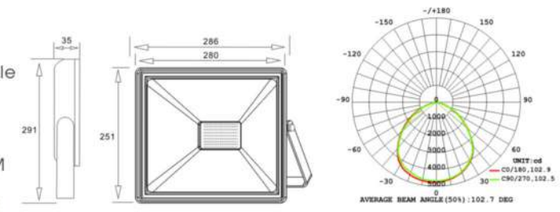

XR-FDA200W-L

4 200W 16000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:350x45x310mm
CTN size:L38.0XW31.5XH33.5 CM
5 pcs/CTN - G.W:14.0KG

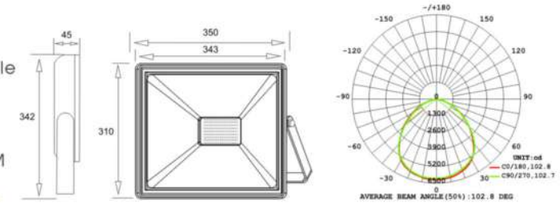

XIANGRUI

FAST Series
SMD10W-500W
LED Floodlight

XR-FDA300W-L

1 300W 24000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G0.75mm2 cable

Aluminum die-casting

Size:386x45x340mm
CTN size:L41.0XW31.5XH36.5 CM
5 pcs/CTN - G.W:19.5KG

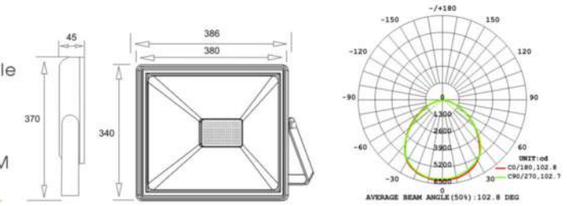

XR-FDA400W-L

2 400W 32000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G0.75mm2 cable

Aluminum die-casting

Size:480x60x310mm
CTN size:L50.5XW41.5XH22.5 CM
2 pcs/CTN - G.W:11.0KG

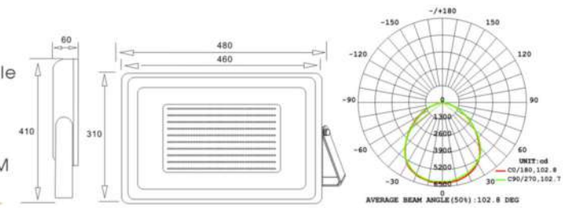

XR-FDA500W-L

2 500W 40000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G0.75mm2 cable

Aluminum die-casting

Size:540x60x375mm
CTN size:L56.5XW44.5XH22.5 CM
2 pcs/CTN - G.W:14.5KG

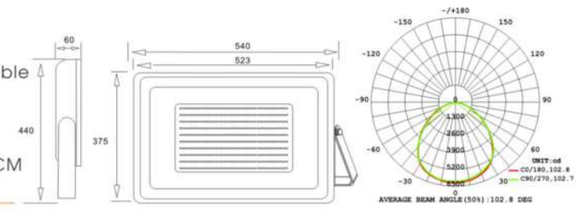

FAST Series
SMD 20W-70W
LED Floodlight

CE RoHS COMPLIANT ERP COMPLIANT ADJUSTABLE

XIANGRUI

FAST Series
SMD 20W-70W
LED Floodlight

XR-FDA20W-LD

1 20W

1600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:118x45x165mm
CTN size:L38XW31.5XH25.5 CM
24 pcs/CTN - G.W:7.8KG

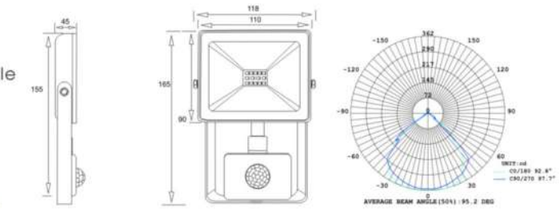

XR-FDA30W-LD

2 30W

2400lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:148x45x195mm
CTN size:L44.5XW31.5XH32.5 CM
24 pcs/CTN - G.W:11.5KG

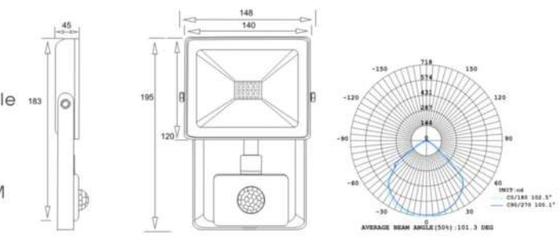

XR-FDA50W-LD

3 50W

4000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:178x48x225mm
CTN size:L50.5XW 31.5XH39.5 CM
24 pcs/CTN - G.W:17.5KG

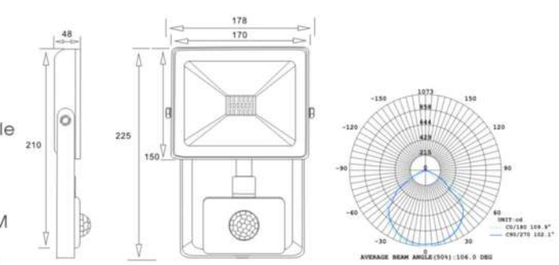

XR-FDA70W-LD

4 70W

5600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:218x48x255mm
CTN size:L46.5XW31.5XH28.5 CM
12 pcs/CTN - G.W:13.5KG

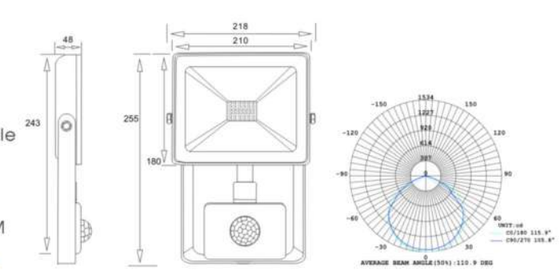

RGB Series
10W-50W
LED Floodlight

CE RoHS COMPLIANT ERP COMPLIANT ADJUSTABLE

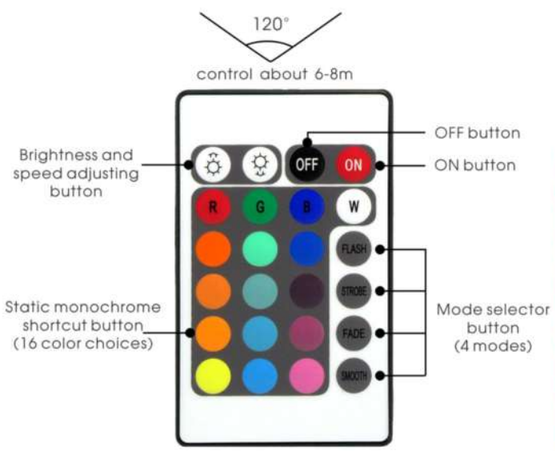

RGB Series
10W-50W
LED Floodlight

XR-FDB10W-RGB **1** 10W RGB, 110° Beam Angle

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:100x33x70mm
CTN size:L43.0XW24.0XH18.5 CM
40 pcs/CTN - G.W:7.5KG

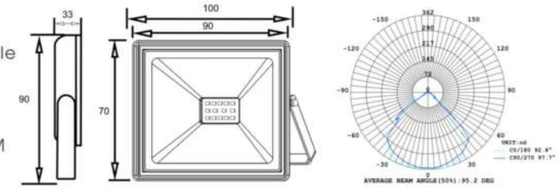

XR-FDB20W-RGB **2** 20W RGB, 110° Beam Angle

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:130x33x90mm
CTN size:L28.5XW28.5XH22.5 CM
24 pcs/CTN - G.W:7.0KG

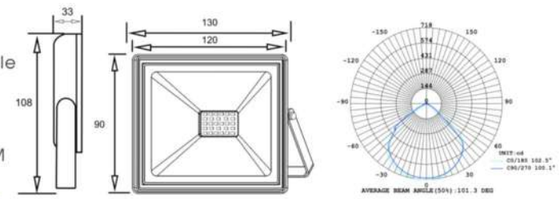

XR-FDB30W-RGB **3** 30W RGB, 110° Beam Angle

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:160x33x130mm
CTN size:L34.5XW23.5XH30.0 CM
20 pcs/CTN - G.W:10.5KG

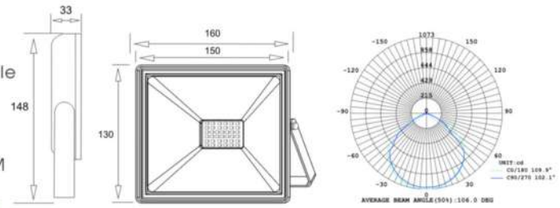

XR-FDB50W-RGB **4** 50W RGB, 110° Beam Angle

RA>80, PF>0.9, SCDM<6
0.15m H05RN-F3G 0.75mm2 cable

Aluminum die-casting

Size:200x33x170mm
CTN size:L43.0XW28.5XH19.5 CM
12 pcs/CTN - G.W:10.2KG

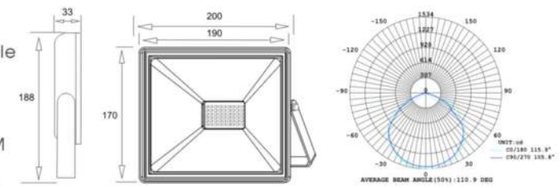

WORK LIGHT
SMD 10W-50W LED Floodlight

CE RoHS COMPLIANT ERP COMPLIANT ADJUSTABLE

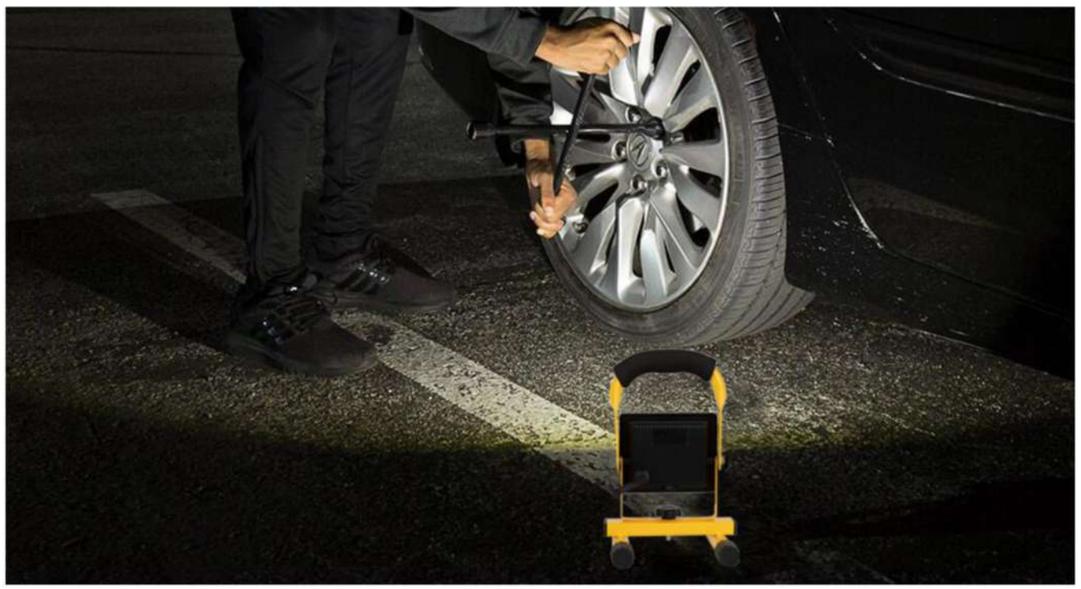

XIANGRUI

WORK LIGHT
SMD 10W-50W LED Floodlight

XR-FDA10W-HB

1 10W

800lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
1.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:146x226x146mm
CTN size:L46.5XW45.5XH35.5 CM
20 pcs/CTN - G.W:15.8KG

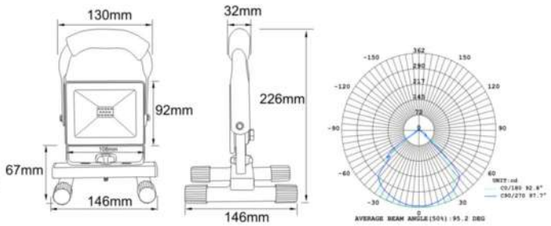

XR-FDA20W-HB

2 20W

1600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
1.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:164x251x164mm
CTN size:L46.5XW45.5XH35.5 CM
20 pcs/CTN - G.W:19.0KG

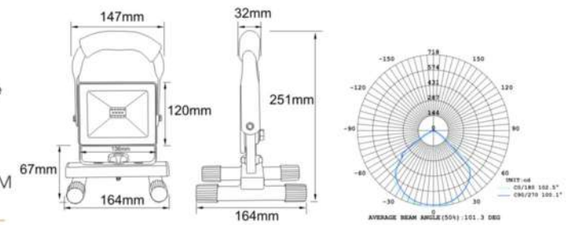

XR-FDA30W-HB

3 30W

2400lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
1.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:190x280x185mm
CTN size:L46.5XW41.0XH26.5 CM
10 pcs/CTN - G.W:13.0KG

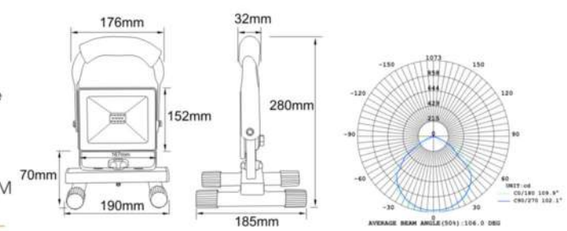

XR-FDA50W-HB

4 50W

4000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
1.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:242x323x190mm
CTN size:L47.5XW46.5XH30.5 CM
10 pcs/CTN - G.W:16.5KG

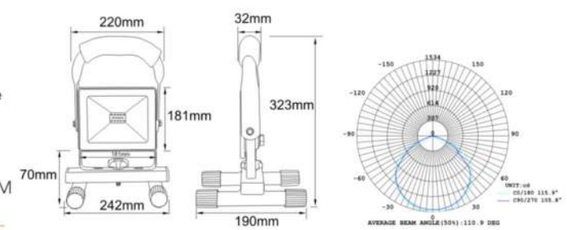

WORK LIGHT
SMD10W-100W
LED Floodlight

CE RoHS COMPLIANT ERP COMPLIANT ADJUSTABLE

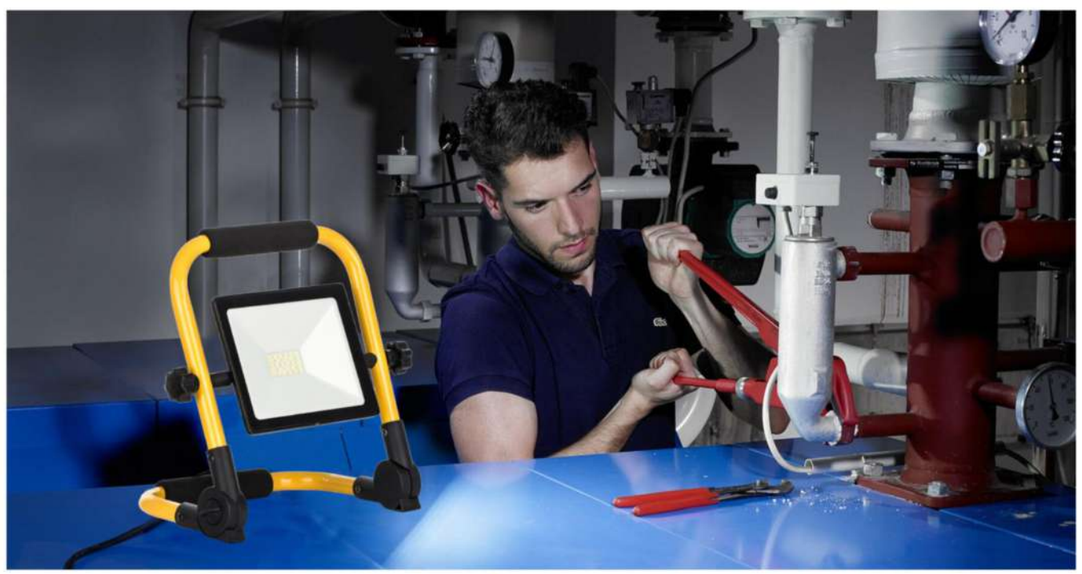

XIANGRUI

WORK LIGHT
SMD10W-100W
LED Floodlight

XR-FDA10W-FB

1 10W

800lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
1.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:175x225x145mm
CTN size:L47.0XW46.5XH40.5 CM
20 pcs/CTN - G.W:16.3KG







XR-FDA20W-FB

2 20W

1600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
1.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size: 250x260x155mm
CTN size:L51.0XW46.5XH45.5 CM
20 pcs/CTN - G.W:19.4KG







XR-FDA30W-FB

3 30W

2400lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
1.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size: 275x290x185mm
CTN size:L51.0XW46.5XH30.5 CM
10 pcs/CTN - G.W:13.8KG







XR-FDA50W-FB

4 50W

4000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
1.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:315x330x190mm
CTN size:L59.0XW46.5XH35.5 CM
10 pcs/CTN - G.W:17.4KG







XR-FDA100W-FB

5 100W

8000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
1.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:380x415x200mm
CTN size:L42.0XW65.0XH39.0 CM
5 pcs/CTN - G.W:12.5KG







WORK LIGHT
SMD10W-100W
LED Floodlight

CE RoHS COMPLIANT ERP COMPLIANT ADJUSTABLE

XIANGRUI

WORK LIGHT
SMD10W-100W
LED Floodlight

XR-FDA10W-TB

1 10W

800lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
2.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Maximum Size:D720xH1683mm
CTN size:L64.0XW27.0XH25.5 CM
2 pcs/CTN - G.W:3.2KG





XR-FDA20W-TB

2 20W

1600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
2.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Maximum Size:D720xH1713mm
CTN size:L64.0XW27.0XH25.5 CM
2 pcs/CTN - G.W:3.8KG





XR-FDA30W-TB

3 30W

2400lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
2.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Maximum Size:D720xH1750mm
CTN size:L64.0XW27.0XH25.5 CM
2 pcs/CTN - G.W:4.3KG





XR-FDA50W-TB

4 50W

4000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
2.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Maximum Size:D720xH1780mm
CTN size:L64.0XW27.0XH25.5 CM
2 pcs/CTN - G.W:5.6KG





WORK LIGHT
SMD10W-100W
LED Floodlight

XR-FDA2x10W-TB **1** 10W

2x800lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
2.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Maximum Size:D720xH1683mm
CTN size:L64.0XW27.0XH25.5 CM
2 pcs/CTN - G.W:5.2KG





XR-FDA2x20W-TB **2** 20W

2x1600lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
2.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Maximum Size:D720xH1713mm
CTN size:L64.0XW27.0XH25.5 CM
2 pcs/CTN - G.W:5.45KG





XR-FDA2x30W-TB **3** 30W

2x2400lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
2.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Maximum Size:D720xH1750mm
CTN size:L64.0XW27.0XH25.5 CM
2 pcs/CTN - G.W:6.3KG





XR-FDA2x50W-TB **4** 50W

2x4000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
2.5m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Maximum Size:D720xH1780mm
CTN size:L64.0XW27.0XH25.5 CM
2 pcs/CTN - G.W:7.0KG





XIANGRUI

WORK LIGHT
SMD10W-100W
LED Floodlight

TIANGONG 1 Series

SMD 10W-20W Rechargeable LED Floodlight

CE RoHS COMPLIANT ERP COMPLIANT

ADJUSTABLE

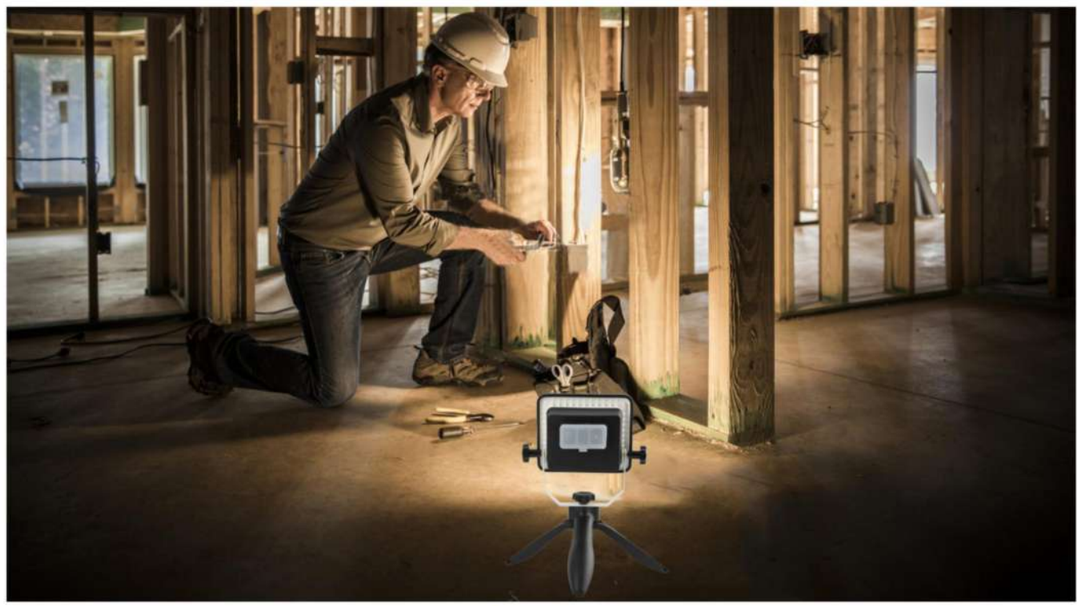

XIANGRUI

TIANGONG 1 Series

SMD 10W-20W Rechargeable LED Floodlight

XR-EM01-10W

1 10W

3hrs for 100%lm / 5hrs for 50%lm working time
700-300lm-FLAS, RA>80, 120° Beam Angle

3000K,4000K,6000K available
Ik06, Class 3,100CM USB cable

Aluminum+Rubber+PA

Size:220x220x225mm
CTN size:L35.5XW28.0XH26.5 CM
16 pcs/CTN - G.W:11.0KG





XR-EM01-20W

2 20W

3hrs for 100%lm / 5hrs for 50%lm working time
1400-1600lm-FLAS, RA>80, 120° Beam Angle

3000K,4000K,6000K available
Ik06, Class 3,100CM USB cable

Aluminum+Rubber+PA

Size:220x220x250mm
CTN size:L35.5XW41.5XH16.5 CM
10 pcs/CTN - G.W:9.5KG





1. 20W work light body
2. LEDS
3. Side locking knobs
4. Locking knob
5. Portable bracket
6. U-Shape Bracket
7. Protective cap
8. USB output socket
9. Charging socket
10. Power light
11. ON/OFF switch with mode function

TIANGONG 2 Series

SMD 10W-20W Rechargeable LED Floodlight

ADJUSTABLE

XIANGRUI

TIANGONG 2 Series

SMD 10W-20W Rechargeable LED Floodlight

XR-EM03-10W **1** 10W

100%lm-50%lm-SOS, 3-5H Running Time
Max. 700lm, RA>80, 120° Beam Angle

3000K,4000K,6000K available
Ik06, Class 3,100CM USB cable

PA6-GF15+AL

Size:175X45X125mm
CTN size:L37.5XW26.5XH27.5 CM
20 pcs/CTN - G.W:11.0KG





XR-EM03-20W **2** 20W

100%lm-50%lm-SOS, 3-5H Running Time
Max. 1600lm, RA>80, 120° Beam Angle

3000K,4000K,6000K available
Ik06, Class 3,100CM USB cable

PA6-GF15+AL

Size:175x55x125mm
CTN size:L37.5XW25.5XH27.5 CM
16 pcs/CTN - G.W:13.2KG





USB OUT 5V 1A

Compact and Foldable for Easy Storage

Light Stays Cool to the Touch

Long-lasting Super-Bright LEDs Never Need Replacing

Plug in to the battery's USB port Wherever, whenever with mobile charging

Multi-function of innovative design (Proprietary technology)

Indoor/Outdoor Approved

Separable USB Charger

li-ion 18650
Great Power 3.7V
10W 3600mAh 2pcs
20W 7200mAh 4pcs

HALO Series
SMD100W-200W
LED High Bay

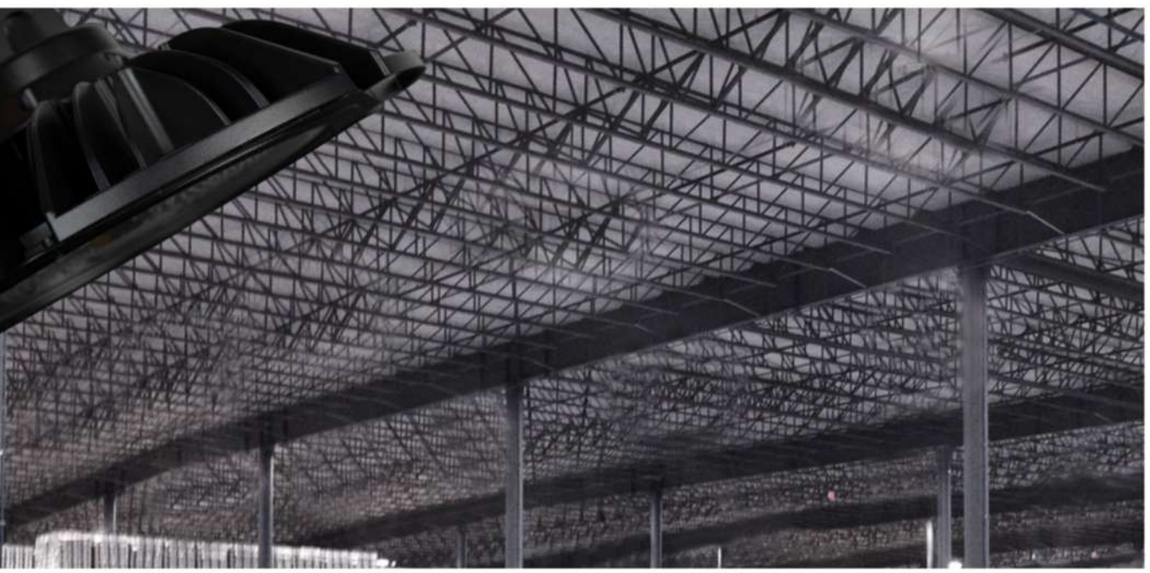

XIANGRUI

HALO Series
SMD100W-200W
LED High Bay

XR-HB01-100W

1 100W 12000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.25m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:¢250x141mm
CTN size:L26.0XW26.0XH19.0 CM
1 pcs/CTN - G.W:1.8KG





XR-HB01-150W

2 150W 18000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.25m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:¢320x161mm
CTN size:L32.5XW32.5XH21.0 CM
1 pcs/CTN - G.W:2.8KG





XR-HB01-200W

3 200W 24000lm,110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.25m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:¢380x161mm
CTN size:L39.0XW39.0XH21.0 CM
1 pcs/CTN - G.W:3.5KG





VENUS Series
SMD100W-200W
LED High Bay

VENUS Series
SMD100W-200W
LED High Bay

XR-HB02-100W **1** 100W 12000lm, 90° /110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.25m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:¢275x107mm
CTN size:L34.0XW34.0XH15.0 CM
1 pcs/CTN - G.W:3.3KG

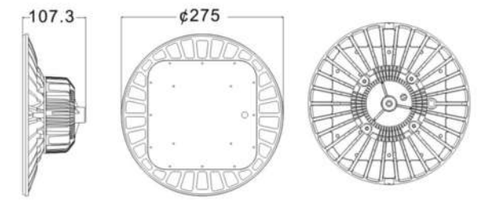

XR-HB02-150W **2** 150W 18000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.25m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:¢320x108mm
CTN size:L38.0XW38.0XH15.0 CM
1 pcs/CTN - G.W:4.2KG

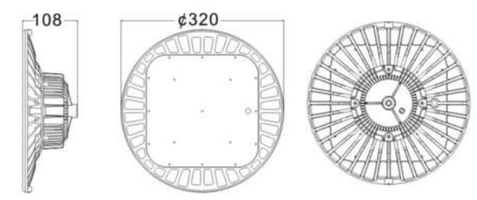

XR-HB02-200W **3** 200W 24000lm,110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.25m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:¢350x110mm
CTN size:L42.0XW42.0XH15.5 CM
1 pcs/CTN - G.W:5.0KG

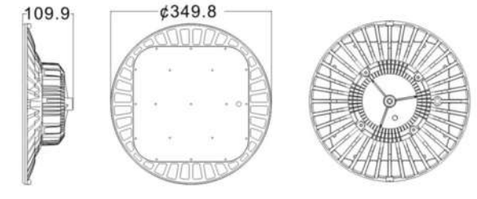

ECO Series
SMD 50W-200W
LED High Bay

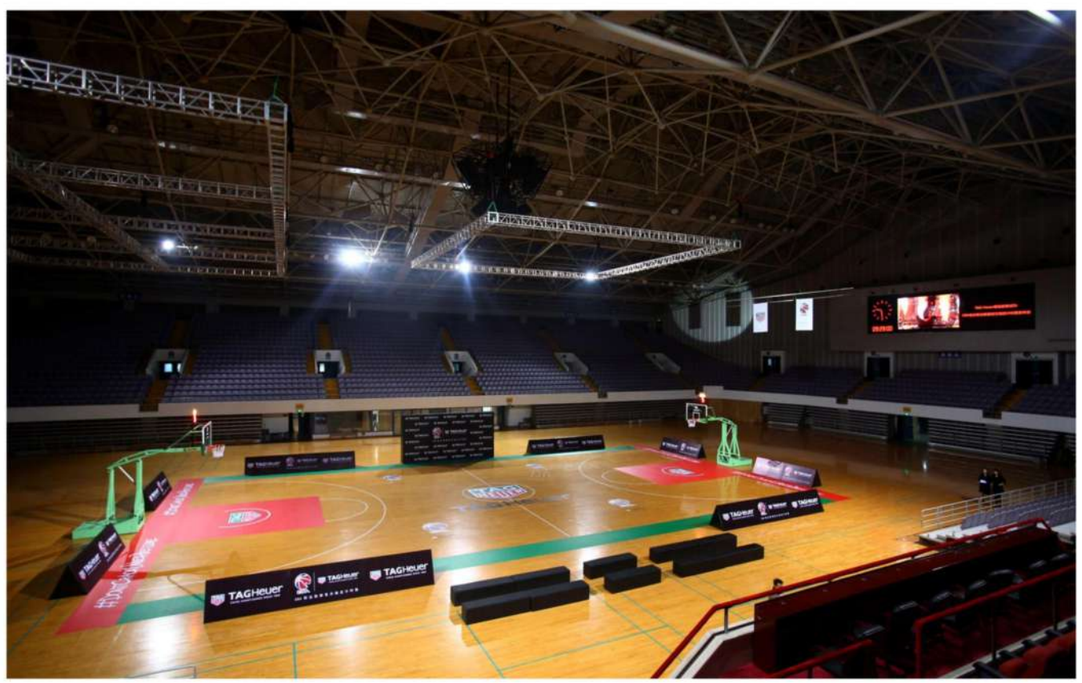

XIANGRUI

ECO Series
SMD 50W-200W
LED High Bay

XR-HB04-50W

1 50W 5500lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.20m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:¢175x80mm
CTN size:L20.5XW48.0XH38.0 CM
10 pcs/CTN - G.W:6.5KG

XR-HB04-100W

1 100W 11000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.20m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:¢240x80mm
CTN size:L27.5.0XW52.0XH41.0 CM
8 pcs/CTN - G.W:8.8KG

XR-HB04-150W

1 150W 16500lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.20m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:¢305x80mm
CTN size:L33.7XW33.7XH52.0 CM
5 pcs/CTN - G.W:8.2KG

XR-HB04-200W

1 200W 22000lm, 110° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
0.20m H05RN-F3G 1.0mm2 cable

Aluminum die-casting

Size:¢360x80mm
CTN size:L39.0XW39.0XH42.0 CM
4 pcs/CTN - G.W:9.7KG

ROOF Series
LED 20W-200W
STREET LIGHT



ROOF Series
LED 20W-200W
STREET LIGHT

XR-ST01-20W

1 20W

2400lm, 30°/45°/60°/90°/120° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
540g housing weight

Aluminum die-casting

Size:315x128x76mm
CTN size:L56.0XW41.0XH34.0 CM
20 pcs/CTN - G.W:16.5KG

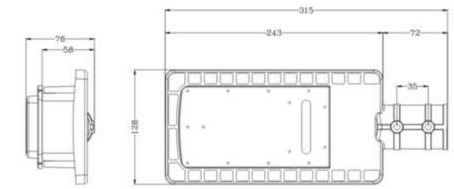

XR-ST01-30W

2 30W

3600lm, 30°/45°/60°/90°/120° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
600g housing weight

Aluminum die-casting

Size:351x142x76mm
CTN size:L47.0XW41.0XH37.5 CM
15 pcs/CTN - G.W:14.8KG

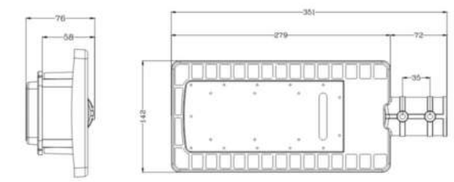

XR-ST01-60W

3 60W

7200lm, 30°/45°/60°/90°/120° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
950g housing weight

Aluminum die-casting

Size:405x166x79mm
CTN size:L42.0XW36.5XH43.0 CM
10 pcs/CTN - G.W:13.5KG

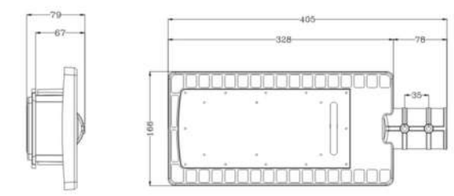

XR-ST01-100W

4 100W

12000lm, 30°/45°/60°/90°/120° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
1570g housing weight

Aluminum die-casting

Size:484x211x83mm
CTN size:L52.5XW26.0XH11.5 CM
1 pcs/CTN - G.W:3.3KG

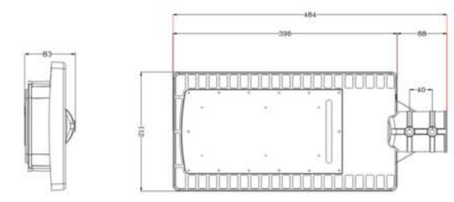

XR-ST01-180W

5 180W

21600lm, 30°/45°/60°/90°/120° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
2150g housing weight

Aluminum die-casting

Size:580x242x83mm
CTN size:L63.0XW29.5XH11.5 CM
1 pcs/CTN - G.W:4.1KG

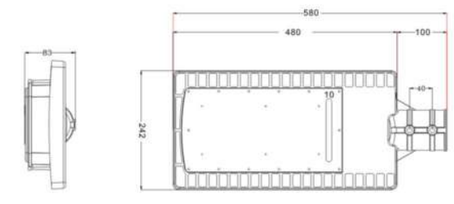

SATURN Series
LED 20W-200W
STREET LIGHT

XIANGRUI

SATURN Series
LED 20W-200W
STREET LIGHT

XR-ST02-30W

1 30W

3600lm, 30°/45°/60°/90°/120° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
720g housing weight

Aluminum die-casting

Size:442x155x66mm
CTN size:L42.5XW34.0XH46.5 CM
10 pcs/CTN - G.W:12.0KG

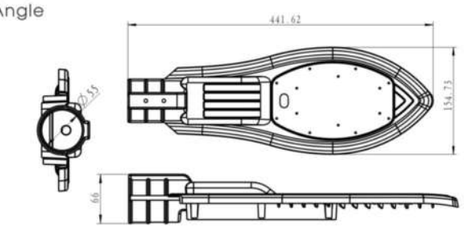

XR-ST02-50W

2 50W

6000lm, 30°/45°/60°/90°/120° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
870g housing weight

Aluminum die-casting

Size:540x200x66mm
CTN size:L45.0XW22.5XH58.0 CM
5 pcs/CTN - G.W:7.5KG

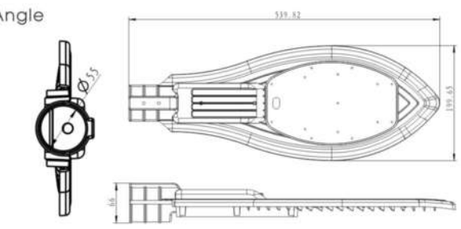

XR-ST02-100W

3 100W

12000lm, 30°/45°/60°/90°/120° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
1500g housing weight

Aluminum die-casting

Size:700*245*76mm
CTN size:L71.0XW25.5XH11.5 CM
1 pcs/CTN - G.W:3.1KG

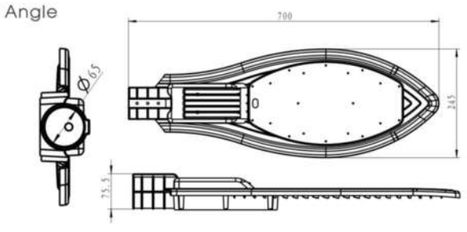

XR-ST02-150W

4 150W

18000lm, 30°/45°/60°/90°/120° Beam Angle
3000K,4000K,6000K available

RA>80, PF>0.9, SCDM<6
2050g housing weight

Aluminum die-casting

Size:770x280x76mm
CTN size:L78.0XW29.0XH11.5 CM
1 pcs/CTN - G.W:3.9KG

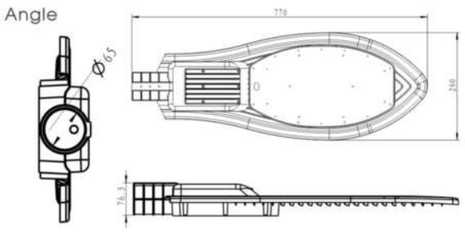

CLASSIC Series
LED 3W-30W
DOWN LIGHT

AC175-260V,50/60Hz

IP 20 | 15° | 24° | 38° | CCT | RA >80 | PF >0.5 | SCDM <6

Epistar SMD



	watts	lumen	material	size	cut hole	q'ty/ctn	size/ctn
XR-DL04-5W	5W	525lm	Aluminum	70x42 mm	55mm	100pcs	50x38x40mm
XR-DL04-7W	6W	600lm	Aluminum	88x60 mm	75mm	100pcs	50x38x40mm
XR-DL04-12W	12W	1320lm	Aluminum	110x72 mm	90mm	60pcs	47x36x41mm
XR-DL04-18W	18W	1900lm	Aluminum	138x70 mm	120mm	30pcs	45x31x42mm

AC175-260V,50/60Hz

IP 20 | 120° | CCT | RA >80 | PF >0.5 | SCDM <6

Epistar SMD



	watts	lumen	material	size	cut hole	q'ty/ctn	size/ctn
XR-DL08-6W	5W	400lm	Aluminum	98x45 mm	75mm	100pcs	54x33x43mm
XR-DL08-10W	10W	750lm	Aluminum	118x47 mm	95mm	100pcs	51x33x64mm
XR-DL08-15W	15W	1150lm	Aluminum	140x52 mm	120mm	60pcs	60x35x46mm
XR-DL08-20W	20W	1600lm	Aluminum	180x54 mm	150mm	40pcs	76x35x40mm

AC175-260V,50/60Hz

IP 20 | 120° | CCT | RA >80 | PF >0.5 | SCDM <6

Epistar SMD



	watts	lumen	material	size	cut hole	q'ty/ctn	size/ctn
XR-DL09-3W	3W	165lm	Aluminum	75x38 mm	60mm	100pcs	48x38x30mm
XR-DL09-6W	6W	360lm	Aluminum	98x38 mm	80mm	100pcs	58x46x30mm
XR-DL09-10W	10W	750lm	Aluminum	118x38 mm	95mm	60pcs	55x42x32mm
XR-DL09-15W	15W	1050lm	Aluminum	140x38 mm	120mm	60pcs	63x48x32mm
XR-DL09-20W	20W	1500lm	Aluminum	180x38 mm	160mm	30pcs	58x40x32mm
XR-DL09-30W	30W	2400lm	Aluminum	220x38 mm	190mm	20pcs	47x47x35mm

CLASSIC Series
LED 3W-30W
DOWN LIGHT

AC110-260V,50/60Hz

IP 20 | 38° | CCT | RA >80 | PF >0.5 | SCDM <6

Epistar SMD



	watts	lumen	material	size	cut hole	q'ty/ctn	size/ctn
XR-DL01-3W	3W	240lm	Plastic + Al+PC cover	70x42 mm	50-60mm	100pcs	55x43x18mm
XR-DL01-5W	5W	400lm	Plastic + Al+PC cover	90x42 mm	75-85mm	100pcs	61x53x22.5mm
XR-DL01-6.5W	6.5W	560lm	Plastic + Al+PC cover	90x42 mm	75-85mm	100pcs	61x53x22.5mm
XR-DL01-9W	9W	810lm	Plastic + Al+PC cover	118x53 mm	90-100mm	100pcs	63.5x35.5x26mm
XR-DL01-12W	12W	960lm	Plastic + Al+PC cover	140x53 mm	110-120mm	50pcs	75.5x34x31mm

AC170-260V,50/60Hz

IP 20 | 38° | CCT | RA >80 | PF >0.5 | SCDM <6

Epistar SMD



	watts	lumen	material	size	cut hole	q'ty/ctn	size/ctn
XR-DL02-3W	3W	240lm	Plastic + Al+PC cover	70x42 mm	50-60mm	100pcs	55x43x18mm
XR-DL02-5W	5W	400lm	Plastic + Al+PC cover	90x42 mm	75-85mm	100pcs	63x61x22.5mm
XR-DL02-6.5W	6.5W	560lm	Plastic + Al+PC cover	90x42 mm	75-85mm	100pcs	63x61x22.5mm
XR-DL02-9W	9W	720lm	Plastic + Al+PC cover	118x53 mm	90-100mm	100pcs	63.5x35.5x32mm
XR-DL02-12W	12W	960lm	Plastic + Al+PC cover	140x53 mm	110-120mm	50pcs	75.5x34x31mm